

Magneplanar CCR Instruction Manual

Table of Contents

1. Introduction/General Description
2. Carton Contents
3. Packaging
4. Amplification
5. Hookup
6. Installation and Placement
7. Phasing
8. Bass Management and Processor Settings
9. Tweeter Attenuation
10. Full-Range Operation (With the Magneplanar DW 1 Woofer or Magneplanar CC Speaker Stand)
11. Service and Shipping
12. Specifications

The CCR is not a "plug 'n play" center channel speaker. We are here to help if you find the instructions confusing. The enclosed Magnepan Test Disk is a "litmus test" to confirm that the setup was done correctly.

1. Introduction/General Description

Congratulations on your purchase of the Reference Magneplanar CCR Center Channel Loudspeaker. The Magneplanar CCR is modeled after the technology of the MG 20.1 with a 2-way, quasi ribbon midrange and true ribbon tweeter. The performance is appropriate for use with either the MG 3.6 and MG 20.1.

2. Carton Contents

- o 1 - CCR Center Channel Loudspeaker
- o 1- Magnepan Wide-Band, Center Channel Pink Noise DVD Test Disc
- o 1 - 1 Ohm Resistor
- o 1 - 4 Amp Normal Blow Fuse
- o 1 - Hex Wrench
- o 1 - Speaker Logo
- o 3 - Each Felt Pads
- o 1- Each Adjustable Foot
- o 1 -Owner's Manual

3. Packaging

Save all packaging. The CCR can be shipped safely only in the original packaging. Should you discard it, packaging is available from Magnepan.

4. Amplification

The CCR is a 3 ohm speaker and should be used with high current amplifiers that are stable with low impedances. Some receivers are capable of driving low impedances, but usually separate amplifiers are built to higher standards and are recommended for use with the CCR.

5. Hookup

The CCR employs a unique, high-current connector. To install speaker cable, simply strip approximately 1/4-inch of insulation from the speaker cable end, insert the cable and tighten the set screw. Cables terminated with banana plugs or pins may also be used. For cable terminated with spade lugs, spade lug adapters are available from your Magneplanar dealer.


Connect the output of a high pass crossover (such as the Magneplanar XO-2) to the input of the CCR (observing correct polarity). If the CCR is connected directly to the center channel amplifier, the processor must be set on "small" center channel speaker. (See Bass Management and Processor Settings section below for correct settings of the processor.)

6. Installation and Placement

The CCR can be mounted in or on a cabinet or on credenza or shelf. The CCR is a "small" speaker. (Three felt pads are included to prevent marring of the bottom surface.) However, a Magneplanar CC Speaker Stand is available for use with the CCR for use as a full-range, free-standing speaker. The CC Speaker Stand has a built-in Magneplanar bass driver that utilizes the same DiPlanar bass technology as the MG 20.1. If the CC Speaker Stand is not used, some form of adjustable bass management is necessary (See Bass Management and Processor Settings section below.)


Like all Magneplanars, the CCR is a dipole speaker. We recommend a minimum of 12 inches clearance, measuring from the back of the CCR to the surface behind the CCR. Damping material behind the CCR will help tame unwanted resonances.

For custom installations that require mounting the CCR, 1/4"-20 T-nuts are built into the bottom of the CCR that can be utilized for different custom requirements. A diagram of the T-nut placement is shown below.

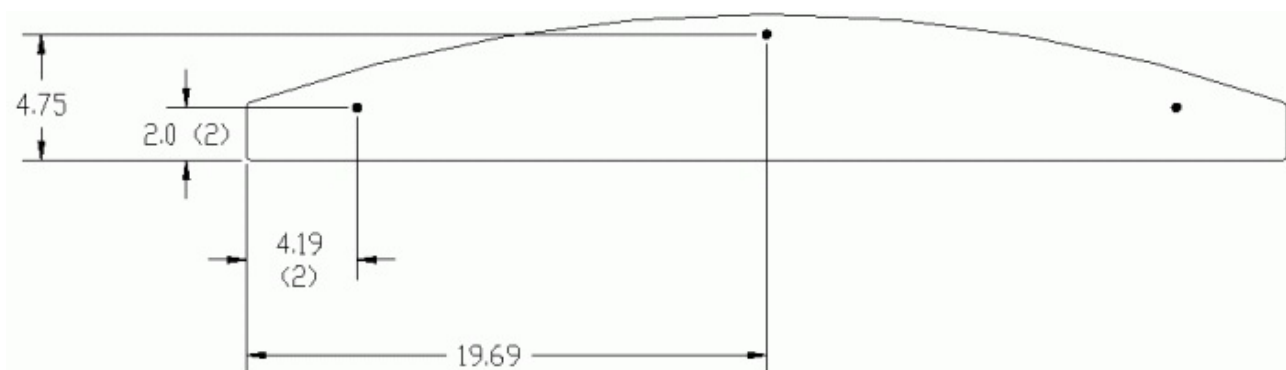

7. Phasing

Correct phasing between the tweeter and midrange is accomplished when the speaker is angled relative to the listener as shown below. The enclosed adjustable foot can be used to tilt the CCR upward. Correct phasing between the midrange of the CCR and the bass augmentation provided by the left/right Maggies is best accomplished as part of the Bass Management and Processor Settings.

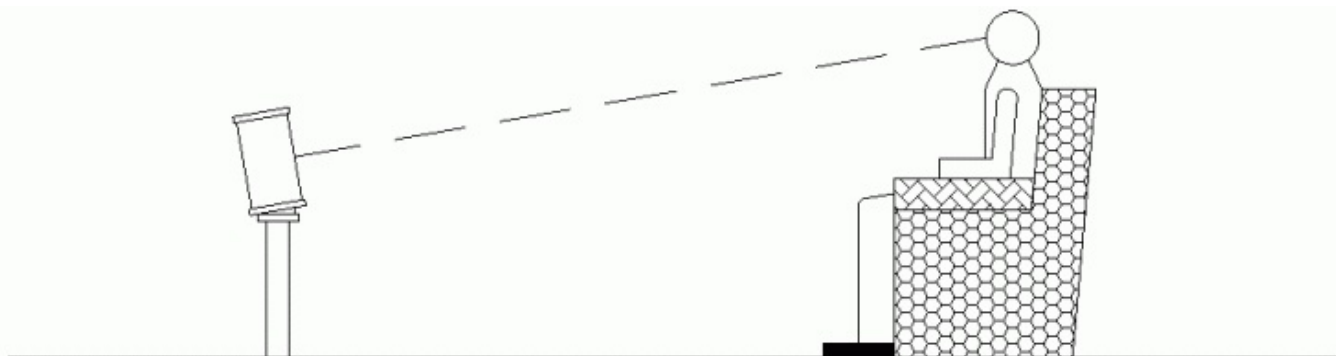

8. Bass Management and Processor Settings

The CCR is called a "small" speaker due to the limited midbass response. **Getting the midbass/bass for the CCR adjusted correctly is the single most important part of getting the most out of your CCR's performance.** As an owner of a high-end system, most likely you own a processor with adjustable crossover points for "small" speakers. Set your processor for "small" center channel speaker. Set the center channel crossover point as high as 200 Hz or as low as 150 Hz if your processor does not provide up to 200 Hz. You will be instructed to turn the subwoofer "off" on your processor. After reading all the instructions below, play the Magnepan Wide-Band Center Channel Pink Noise DVD which is included with your CCR. If the correct procedures are followed, your CCR will give the illusion of a large Magneplanar in the center. If your processor does not have flexible crossover settings, the Magneplanar CC Speaker Stand or DW 1 Woofer are the best options to achieve good center channel bass/midbass.

There is a lack of flexibility with the majority of processors on the market. In the "small" center channel mode, most processors automatically route the center channel bass to the subwoofer. This will not give satisfactory performance with your CCR. The solution is simple; however, this part of the setup has confused a lot of customers. Even if you don't understand initially, go ahead and do as we instruct. And if you need some help, please call. Even though you will probably be using a subwoofer, set your receiver or processor for "no subwoofer." This may seem illogical, but it is necessary for the proper integration of the center channel midrange and bass.

Here is how it works -- If you set the processor for "no subwoofer," there is no option for routing the center channel midbass and bass. The processor *must* send the center channel midbass and bass to the "large" left/right Magneplanars. That is *exactly* what we intend for you to get the best possible performance from your CCR. Your full-range, left/right Magneplanars will provide the center channel midbass and bass, thereby giving the illusion of a large Magneplanar in the middle. The definition of your left/right Magneplanar bass/midbass is vastly superior to the bass that can be achieved if the center channel bass were routed to the subwoofer.

The usual practice of routing the bass to the subwoofer is less than satisfactory in most installations with Magneplanar center channel speakers. Often there is a significant "hole" in the center channel midbass response when higher crossover points are used. In addition, subwoofers are best suited for augmenting "large" speakers below 40 Hz and are considered "muddy" or of poor quality when higher crossover points are used above 40-60 Hz. At a crossover point of 150-200 Hz, the discontinuity between the CCR's "fast" quasi ribbon midrange and the relatively "slow" subwoofer becomes very obvious. Of course, you probably plan to use a subwoofer for home theater.

To drive your subwoofer with this configuration, use the pre-amp output from the front left/right of your processor. (One or two Y-adapters will be necessary.) Be sure that the left/right "large" Maggies are set for "large" with no roll-off of the bass. Since the signal from the front left/right pre-amp outputs is "full range" (down to 20 Hz), the subwoofer will receive all the deep bass information. When the processor is set for "no subwoofer", the bass from the .1 (LFE) is routed to the "large" front left/right Magneplanars. The LFE bass which is sent to the left/right "large" speakers is in mono. If your subwoofer has only one input, it is not necessary to drive the subwoofer with both the left and right signal. (Note- The .1 or LFE bass information will NOT damage your left/right Magneplanars.)

The benefits of achieving the illusion of a full-range Magneplanar in the center channel with this hookup technique will be appreciated 100% of the time. But, what about the absence of the .1 channel? All the same bass from explosions, etc. from the .1 channel are on the "full range" or "large" front channels and will be sent to the subwoofer with our recommended hookup.

To prevent "muddy" bass, adjust the subwoofer crossover point and level so it does not overlap with the "full-range" front left/right Magneplanars. The goal of a Magneplanar home theater system is quality over quantity. Excessive deep bass does not enhance realism.

The final steps in checking phase and center channel bass response is to confirm that the front left/right speakers are in-phase with the CCR and that the center channel bass/midbass is in-phase with the CCR. (Again, this can get a little confusing.)

First, using a standard test DVD, confirm that the CCR is in-phase with the front left/right speakers. When in-phase, the audio image will appear between the CCR and either of the front left/right speakers. Then, using the Magnepan DVD test disc, check the phase between the CCR and the center channel bass/midbass provided by the full-range left/right speakers. Reverse the phase on the CCR. In some cases, especially if the CCR is not equal-distance to the front left/right speakers, the frequencies between approximately 100-200 Hz may increase and it will be necessary to operate the CCR with the phase reversed.

The final bass and midbass adjustments can be made to give the illusion of a large Magneplanar in the middle by fine-tuning the crossover point of the CCR and by level adjustments relative to the level of the left/right Maggies. The Magnepan Test DVD (which is included with your speaker) provides wide-band center channel pink noise, but without the use of a real-time analyzer, most consumers may wonder if the pink noise has the proper balance from bass to mids to highs. However, by playing pink noise through the large left/right Maggies, a listener can hear what pink noise should sound like and then use that sound to compare to the pink noise from the CCR to judge if the balance is correct. An instant A-B test can be conducted by switching the processor from "no center" channel speaker to "small center" channel. In the "no center" mode, you will hear the pink noise through your "large" left/right Maggies and this can be compared to the pink noise from the CCR. When the CCR is playing the pink noise, put your ear next to both the left/right speakers to confirm that the "large" speakers are producing the bass for the center channel pink noise.

If you are having trouble getting similar pink noise sound from the CCR as compared to the large left/right Maggies, the problem might be the level setting (with respect to the left/right speakers), the crossover setting or the phasing between the CCR and the left/right speakers. Turn the subwoofer "off" for the purposes of this test to allow concentration on creating a "large" Maggie in the middle. Keep in mind that due to the fact that center channel speakers are often placed in less-than-ideal acoustical environments, exactly duplicating the left/right Maggies is not possible unless the same acoustical rules are followed as the left/right speakers.

When toggling between "no center" and "small center", keep in mind that you are comparing the illusion of ONE "large Maggie in the middle" vs. TWO of your left/right Maggies played simultaneously. For the comparison to be fair and equal, it would be necessary to unplug one of your left/right Maggies ONLY in the "no center" mode and then plug it back in when in the "small center" mode.

You have control over 3 parameters to create the illusion of a large Maggie in the middle-- 1) Crossover point. 2) Level setting with respect to the left/right speakers. 3) Phase. You will need to remember all three as you fine-tune your CCR.

We have had a number of reports that the automatic equalization systems built into some processors have had less-than-desirable results with Magneplanars. We are investigating this further, but, apparently the equalization systems are not compatible with our recommended hookup procedure. We recommend that you defeat the automatic EQ system.

A small number of processors allow selection of crossover slopes in the "small" center mode. Do not use steep, 4th-order slopes.

9. Tweeter Attenuation

The output of the CCR tweeter can be reduced by replacing the jumper with a resistor (1 ohm, supplied with the speaker). Other values are available from Magnepan, if desired.

10. Full-Range Operation (With the Magneplanar DW 1 Woofer or Magneplanar CC Speaker Stand)

The CCR is a "small" speaker and if free-standing operation is desired, either the Magneplanar CC Speaker Stand or the DW 1 Woofer can be used with the CCR to provide full-range Magneplanar center channel performance. See the respective manuals for their use with the CCR.

11. **Service and Shipping**

In the unlikely event you should need service for your CCR Loudspeaker, we recommend you return it through your dealer. He is experienced in providing service and can assist you if the speaker must be returned to the factory. If you determine you need to return it directly to Magnepan, call for a return authorization and ship the speaker freight prepaid to:

Magnepan, Incorporated

1645 Ninth St.

White Bear Lake, MN 55110

1-800-474-1646

Include a note describing the nature of the problem. Please include your name, address, and a daytime telephone number.

12. **Specifications**

System Description: Curved, two-way quasi ribbon midrange, with true ribbon tweeter

Midrange Radiating Area: 213 sq. inches

Frequency Response: 200 Hz-40 kHz +- 3 db

Recommended Power: See Frequently Asked Questions

Sensitivity: 88 db, 2.83v, 1 Meter, 500Hz

Impedance: 3 Ohms

Crossover Frequency: 200Hz-40 kHz

Dimensions: Width- 39.5 inches, Height- 15 inches, Depth- 5.5 inches

Warranty: Three years on speaker, one year on tweeter, to original owner

Weight: 27 lbs.